

Product Catalog

DECK | DOCK | RAIL | PORCH





LUMBEROCK®

Premium Decking

SUPERIOR CRAFTSMANSHIP


Uncompromising ingenuity. Exceptional value.

We are pleased to introduce you to our full line of Lumberock® Premium Decking products. Our Professional deck boards are engineered to last a lifetime with no maintenance required beyond a seasonal cleaning. Your beautifully built deck or dock will offer years of comfort, satisfaction and enjoyment. Above all else, know that our company's core values of honesty and integrity are ingrained in the work we do every day. We invite you to experience the superior quality of Lumberock Premium Decking.

Lum•ber•ock /lūm'ber'ok/

noun

1. completely synthetic dimensional lumber manufactured from the unique combination of HDPE plastic and a natural mineral fill material.
2. known for its increased strength, durability and performance.




PUTTY



CHOCOLATE BROWN

We deliver a quality product that does what is PROMISED...season after season.

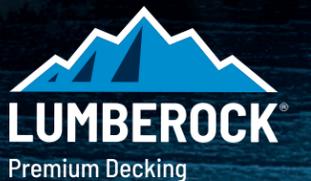

LUMBEROCK®

Premium Decking

DECKING



Increased Strength & Durability

Minimal Maintenance

Easy to Install

No Permanent Staining

Completely Waterproof

No Organic Fills or PVC

No Noticeable Fading

Natural Wood-Grain Pattern

Will Never Rot, Crack or Splinter

High Performance

Mold & Mildew Free

Impenetrable Surface

Cuts & Routers Like Wood

BACKYARD BLISS

Creating the perfect outdoor oasis requires big ideas, careful planning and the right materials. Whether your dream deck is the focal point of a landscaping masterpiece or a simple spot to kick back and relax, Lumberock deck boards will enhance the beauty of your outdoor space and increase the value of your decking project.

Lumberock uses innovative extrusion technology to combine a mineral-fill compound with high-density polyethylene plastic. This formula allows us to manufacture solid, non-porous dimensional profiles that feature increased strength, decreased thermal expansion and total resistance to water, mildew, mold and insect infestation. Our Limited Lifetime Warranty protects against rotting, cracking, staining, splitting and peeling. Your Lumberock deck will look as stunning in fifty years as it does today.

Lumberock is available in solid profiles for face fastening and grooved profiles for hidden fastening to give you that smooth, seamless finish.

DECK & DOCK PROFILES

PROFILE	DESCRIPTION	ACTUAL DIMENSIONS	LENGTHS
	5/4x6 Board	1"x5.5" (2.5cm x 14cm)	12ft, 16ft
	5/4x6 Groove & Groove	1"x5.5" (2.5cm x 14cm)	12ft, 16ft
	5/4x6 Tongue & Groove	1"x4.875" (2.5cm x 12.7cm)	12ft, 16ft
	1x10 Trim Board	0.75"x9.5" (1.9cm x 24cm)	12ft
	2x6 Board	1.5"x5.5" (3.8cm x 13.7cm)	12ft, 16ft
	2x6 Groove & Groove	1.5"x5.5" (3.8cm x 13.7cm)	12ft, 16ft
	2x6 Tongue & Groove	1.5"x4.875" (3.8cm x 12.7cm)	12ft, 16ft
	2x8 Board	1.5"x7.5" (3.8cm x 19cm)	12ft, 16ft
	4x4 Board	3.5"x3.5" (8.9cm x 8.9cm)	12ft, 16ft

Custom lengths available with a minimum order.

Custom lengths are available at no additional cost with a minimum order of 500 lineal feet and a minimal manufacturing lead time.

No pre-drilling is necessary.

Lumberock should be fastened to the deck frame using standard fastening systems, such as stainless steel screws.

For 5/4x6 boards, we recommend a joist span of 16" on-centers for residential projects and 12" on-centers for commercial/angle projects.

For 2x6 and 2x8 boards, we recommend a joist span of 24" on-centers for residential projects and 16" on-centers for commercial/angle projects.

No special tools are required for installation.



DOCK & MARINA

GO AHEAD, GET IT WET

Lumberock Premium Decking is engineered to withstand harsh, wet environments making it the ideal choice for your dock, marina, boardwalk or swimming pool project.

COMPLETELY WATERPROOF

Lumberock deck boards are solid throughout with a closed-molecular formula that prevents water absorption from within, making it completely waterproof. This allows Lumberock to endure prolonged submersion in saltwater or freshwater.

NO NOTICEABLE FADING

Lumberock fades so slightly you will never notice any color change. Our UV-protecting color additives ensure that constant exposure to sunlight will have no noticeable effect on Lumberock plastic lumber.

IMPENETRABLE SURFACE

Bacteria, insects and other organisms that thrive in areas with lots of moisture cannot permeate the surface or the interior of the board. Because no organic fills are used, there is nothing for mold and mildew to adhere to and nothing for water to decompose.

SLIP RESISTANT & SPLINTER FREE

You can stroll barefoot along your dock without worrying about splinters or harsh cracks, as evidenced by our Limited Lifetime Warranty. The embossed wood grain finish reduces slipping, even in wet conditions.



REDWOOD



PUTTY



GRAY

Waterproof Lumberock can withstand even the harshest marine environments.

RAILING



IT'S ALL IN THE DETAILS

What deck would be complete without a railing system? Lumberock has all of the profiles you need to create durable deck railings consistent with the color-combination of your surface boards. All of our railing profiles are made with the same proprietary formula to ensure consistency.

Use the following profiles to create your Lumberock railing system.

RAILING PROFILES

PROFILE	DESCRIPTION	ACTUAL DIMENSIONS	LENGTHS
	Top & Bottom Spindle Support (2x4 Board)	1.5"x3.5" (3.8cm x 8.9cm)	12ft, 16ft
	Top Rail (5/4x6 or 2x6 Board)	1"x5.5" (2.5cm x 14cm) 1.5"x5.5" (3.8cm x 13.7cm)	12ft, 16ft
	Spindles & Support Blocks (2x2 Baluster)	1.375" x 1.375" (3.48cm x 3.48cm)	12ft (cut to size)

Custom lengths available with a minimum order.

COLOR GUIDE



BEAUTIFUL, NATURALLY

All Lumberock dimensional deck and railing boards are available in twelve natural colors to suit your individual taste and preference. We offer one of the widest color spectrums available on the market today, and the deep wood grain pattern engrained on the surface of the board mimics the look of natural wood. Mix and match our bold colors to create a sensational outdoor space.

The consistency of color throughout our plastic lumber minimizes the appearance of scratches.

Lumberock's® non-porous composition will not allow stains to adhere to the surface of the board.

LESS TIME FIXING MORE TIME ENJOYING

Enjoy the low maintenance benefit that Lumberock provides.




One of the primary advantages to building a Lumberock deck or dock is that the boards require almost no maintenance whatsoever after their installation. You can say "good-bye" to the hassle, time commitment and cost of staining, painting, sanding, waterproofing and insect spraying that comes with the use of traditional lumber and composites. Never sand, stain or seal a deck again! Lumberock lets you spend more time enjoying the outdoors and less time keeping it off your deck.

CLEANING & CARE

When dirt or debris begin to accumulate on your deck or dock, simply sweep it away, hose it off or lightly wash the boards with soap and water. Any standard household cleaner can be used without harming the plastic. Occasionally, mold and mildew will form on dirt that has built up on the boards, but it will not permeate the surface of the board and can be removed with a light pressure washing. We recommend using a maximum of 1800psi with a 20-degree nozzle. Thanks to the non-porous, solid composition of the boards, stains from food, oils, beverages, grease and so on will not adhere to Lumberock and spills are easily washed away.

Cost of Lumberock® vs. Cost of Wood

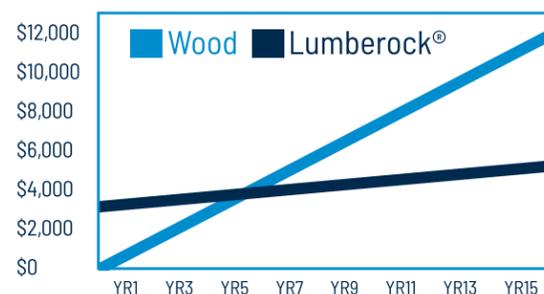

PRODUCT COMPARISON	Wood	Wood Composite	PVC/Vinyl Cellular PVC	Lumberock Premium Decking
No noticeable fading				X
Will never rot, crack or splinter			X	X
No pre-drilling during installation	X		X	X
Routing leaves a smooth, clean look	X			X
No bi-yearly staining or painting		X	X	X
Impervious to water (incl. saltwater)				X
Solid color throughout material	X	X		X
Offer color-matching railing system profiles				X
Limited lifetime warranty			X	X



Explore the versatility of Lumberock.

ONLINE RESOURCES

FIND IT AT LUMBEROCK.COM

Whether you're just looking for more information or you're ready to place an order, lumberock.com features all kinds of useful tools to get your project started. Visit us at lumberock.com today.




MULTIMEDIA GALLERY

- ▶ Browse photos and videos to gain inspiration for your own decking project
- ▶ Download printable literature and brochures




TECHNICAL SPECIFICATIONS

- ▶ Review Lumberock test results
- ▶ Learn about our certifications and associations
- ▶ Register your Limited Lifetime Warranty

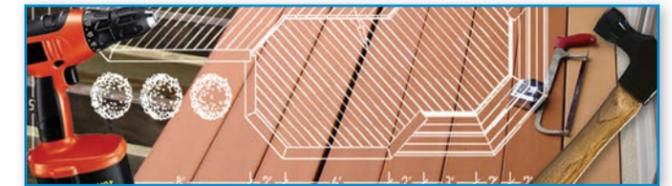

FOR PROFESSIONALS

- ▶ Learn how to become a Lumberock dealer, distributor or contractor

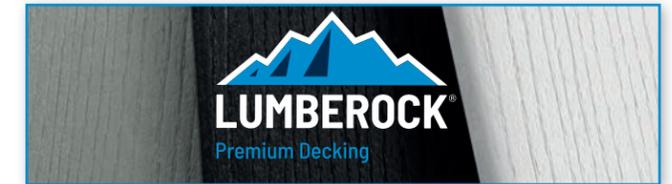


CONTACT US

- ▶ Request samples of Lumberock
- ▶ Send us an email with your questions
- ▶ Find a Lumberock dealer near you



LUMBEROCK PRODUCT LOCATOR

Lumberock.com features a convenient Product Locator to help you find a contractor, dealer or distributor in your area. As an up-and-coming company, our distribution is limited in some areas, however, you can always order direct by calling us toll-free at 800-480-2327 or sending an email to info@lumberock.com.

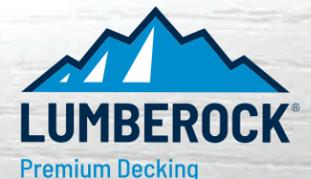

DECK INSTALLATION GUIDELINES

Please note that Lumberock Premium Decking claims no responsibility for the improper installation of our product. All installations are unique and it is the sole responsibility of the installer to determine specific requirements in regard to each application. We recommend that a licensed architect, engineer or local building official review all designs before installation.

Knowing how to work with Lumberock Premium Decking is the key to success and to the elimination of call backs. As with most synthetic deck boards, Lumberock Premium Decking will expand in the heat and contract in the cold. It's important to note that the acclimation of the board to the current ambient temperature prior to final cuts and fastening of the board is critical.

We recommend not using end to end butt joints and keeping boards to a minimum length. Best practice includes applying deck boards across the shortest length of the deck whenever possible.


In these guidelines, you will find procedures to eliminate problems associated with unsightly gaps that could occur if these procedures are not followed. By taking the time to do the installation correctly, you will be providing a beautiful deck or dock that will look great for a lifetime with very little maintenance required.

Handling & Storage

- Always keep Lumberock Deck Boards clean prior to installation.
- Note that all Lumberock Deck Boards are manufactured longer to allow for the ends to be trimmed prior to or after installation should any damage occur during handling or storage.
- Store Lumberock Deck Boards out of the sun and avoid laying boards directly on hot surfaces to avoid a difference in board temperature when installing.
- Lay boards flat. If stored off the ground, support boards every 18" and if boards are stacked higher than one bundle, supports should line up vertically.
- Be sure to lift each board individually versus sliding across bottom boards. This will prevent hidden debris from damaging the boards.
- In order to allow for assimilation of Lumberock deck boards to current temperatures, lay out individual boards in advance of final cuts and fastening of the boards to the deck or dock frames. You will have better success the longer that you allow the board to assimilate to current temperatures. Laying the individual boards out overnight is optimal.

Deck Design and Layout

In order to eliminate noticeable gapping, we encourage the use of a transition board or a "picture frame" design instead of utilizing butt joints whereby two boards are installed end to end. In the utilization of transition board, a board is placed perpendicular to and in between two boards where the design layout is longer than one board. Joints should not be staggered, but rather uniform and broken up with a transition board.

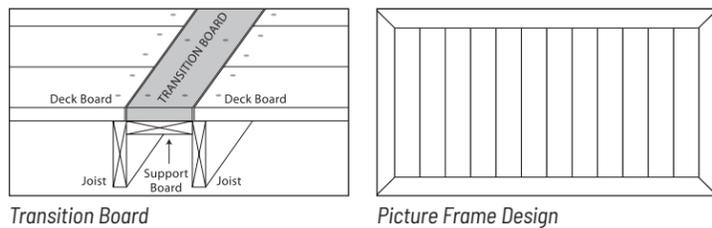

As a rule of thumb, shorter boards (16 feet or less) experience less movement than longer lengths and should be incorporated into the deck design and layout whenever possible.

The best practice at installation is always to run the joists in the long direction which will provide for the use of shorter length deck boards. When converting a deck frame from short run joists to long run joists, a 2x4 sleeper lying flat could be utilized on 16 inch centers across 2x joists. The sleepers can be fastened to each of the 2x joists.

Tools and Working with Lumberock Premium Decking

Lumberock Premium Decking can be cut and shaped with ordinary wood working tools. Pre-drilling is not necessary and carbide saw blades are not needed. One of the true benefits of Lumberock Premium Decking is the unique ability to router the ends to a beautiful finish. Lumberock Premium Deck boards can be bent, curved and shaped using approved heating blankets and ovens. Should the need



Routed Board

to rip a board arise, it is imperative to rip both sides of the board to avoid possible curvatures. When cutting notches into Lumberock Premium Decking to go around posts, it is imperative that you oversize the cut by a 1/2 inch to allow for movement around the post and to prevent cracking of the board which will occur if this is not planned for accordingly.

When fastening, place screws no closer than 3/4 inch from the end of the board.

Framing and Joist Span


The frame of a deck is its primary support structure, consisting of posts, beams and joists. Follow these deck framing guidelines before installing Lumberock Premium Decking. All joists must be level and structurally sound for new and existing deck frames.

Use the chart below to determine the appropriate joist span for your residential or commercial project. Deck boards can be placed perpendicular to the joist or placed diagonally on the joist. Remember to install Lumberock Premium Decking boards with the wood grain pattern facing up to enhance the look and improve the slip resistance of the board.

Maximum Joist Framing Span

BOARD PROFILE	RESIDENTIAL		COMMERCIAL	
	90° Perpendicular	45° Diagonal	90° Perpendicular	45° Diagonal
5/4 x 6 Boards	16"	12"	12"	12"
2 x 6 Boards	24"	16"	16"	16"

Joist framing span applies to Standard, Groove & Groove and Tongue & Groove profiles.

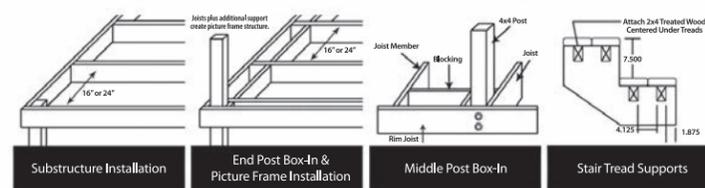

Gapping and Thermal Expansion

Lumberock Premium Decking boards are gapped end to house, end to trim or end to feature board based on their location within your project. Proper gapping is necessary to accommodate for inherent thermal expansion properties. As discussed elsewhere in these guidelines, we do not recommend that you incorporate end to end boards in your design but rather incorporate a "picture frame" design whereby you utilize a feature board in areas where more than one board length is required. Lumberock Premium Decking boards do not need to be gapped side-by-side. The amount of expansion and contraction that will occur depends on the length of the board and temperature of the board at time of installation.

Refer to the thermal expansion gap chart below to determine the necessary gap at time of installation. You can expect that a 12-foot board installed at 60 degrees F will expand 1/4" upon reaching a maximum temperature of 120 degrees F and will contract 1/4" when reaching a minimum temperature of 0 degrees F. In order to account for movement on both ends of the board, the recommended gap to leave on each end of the board would be 1/8". It is necessary to allow the boards to acclimate to current installation temperatures as outlined earlier in these guidelines.

Estimated End to House, End to Trim or End to Feature Board Gap Recommendation

Board Length	Installed Temperature						
	End Gap to leave for expansion in inches						
	0	20	40	60	80	100	
6	0.17	0.14	0.10	0.07	0.03	0.00	
8	0.23	0.18	0.14	0.09	0.05	0.00	
12	0.34	0.27	0.2	0.14	0.07	0.00	
16	0.45	0.36	0.27	0.18	0.09	0.00	

Decimal Conversion	
1/8	0.13
3/16	0.19
1/4	0.25
5/16	0.31
3/8	0.38
7/16	0.44
9/16	0.56
11/16	0.69

FASTENING OPTIONS


Lumberock Premium Decking can be installed using a face fastening system or a hidden fastening system. No pre-drilling is necessary to install Lumberock Premium Decking and color-match screws are available. Two screws are needed per joist board. For joist spans of 16" centers, 4.5 screws per square foot will be needed. For joist spans of 24" centers, 3 screws per square foot are needed. This figure does not include trim or railing screws.

Screws that are face fastened are screwed directly down from the deck or dock surface into the wood framing underneath. We recommend 2 1/2" or 3", #8 or #10 stainless steel, flat head deck screws or Headcote stainless steel composite deck screws. (Visit www.lumberock.com for Headcote color match options). Smaller size deck screws are not recommended. Face fastening is the best option to mitigate thermal expansion properties and to protect against potential wind and/or water uplift which could occur with a hidden fastening option.

A hidden fastener system attaches the board to the frame without leaving any marks on the surface of the deck or dock board. Hidden fasteners biscuits are recommended for boards over 16-feet in length in climates where extreme temperature changes will occur. This fastening system will allow the board to expand and contract with annual temperature changes. Groove and groove profiles are available and work with a number of available hidden fastening options sold nationally. (Visit www.lumberock.com for approved hidden fastener options).

RAILING INSTALLATION GUIDELINES

Name	Item	Quantity	Name	Item	Quantity
Top Spindle Support	2x4	1	Support Blocks	2x2	2
Bottom Spindle Support	2x4	1	Top Rail	2x6	1
Spindles	2x2	13			

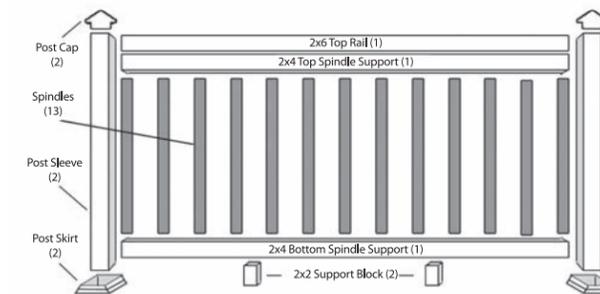

Step 1 - Cut Materials for a 6 foot section

Measure the exact distance between each set of posts and cut the 2x4 Top Spindle Support, the 2x4 Bottom Spindle Support and the 2x6 Top Rail accordingly. Use 13 - 2x2s as the Railing Spindles and space them evenly between the Post Sleeves. Cut the remaining 2x2s into two 3 1/2" Support Blocks.

Step 2 - Assemble Spindles

Screw the middle Spindle to the center point of the 2x4 Top and Bottom Rails. Attach the remaining Spindles, working your way out from the center point. Leave a maximum 3.9" gap between each Spindle. Center the 2x2 Spindles on the 3 1/2" side of the 2x4s. Screw all Spindles to the 2x4 Top and Bottom Rails.

Step 3 - Attach the Support Blocks

Center and attach the two (2) Support Blocks under the 2x4 Bottom Spindle Support as shown on the above diagram.

Step 4 - Attach 2x6 Top Rail


Center the Top Rail to the Top Spindle Support Board and attach.

Step 5 - Attach Railing Assembly to Posts

Measure the exact distance between posts and confirm maximum distance between is six feet or less. Trim rail ends to length if needed to fit in between the posts. Attach the Rail assembly to the posts.

TRIM BOARD INSTALLATION GUIDELINES

Install Lumberock 1x10 trim boards using two screws every 16" or less. We recommend 1 3/4" SplitStop Fascia Screws, or #8 or #10 stainless steel, flat head deck screws or Headcote stainless steel composite deck screws. We suggest pre-drilling a hole larger than the diameter of the screw to account for lateral movement. **Important! Do not over tighten screws.**

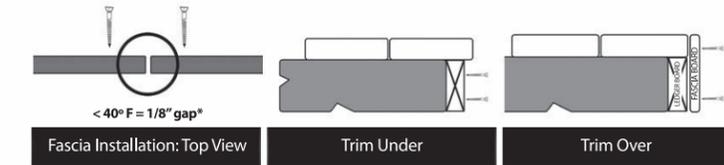

TONGUE & GROOVE INSTALLATION GUIDELINES

Install Lumberock tongue and groove profiles using one screw at every joist. We recommend #7 or #8 stainless steel screws.

PILING STRIP INSTALLATION GUIDELINE

We recommend the spacing for screw application of every 16" vertically and predrilling with a hole size slightly smaller than the screw diameter. Fasten using #7 stainless trim screws.



WARRANTY

Lumberock Premium Decking warrants that Lumberock materials will not rot, split, crack, splinter or be adversely affected by insects. Slight color variation is normal with any plastic composite decking, is not warranted, a visual inspection of your decking before final installation is recommended to be sure any variation is considered acceptable by the end user. This limited warranty shall apply to all such materials with respect to which a claim is made to Lumberock (including return of the claimed defective material if required by Lumberock as hereinafter provided) accompanied by an original receipt and a written statement describing each defect claimed and which Lumberock's inspection shows to be defective, provided that this limited warranty shall not apply to any materials which have been subject to accident, or improper handling, installation, maintenance, repair or alteration, or used in anyway contrary to good standard of practice within the building industry. Lumberock's obligation under this limited warranty, and purchaser's exclusive remedy for the breach thereof, shall be limited to Lumberock's correction of any defect in material or workmanship by, at Lumberock's option and expense (excluding shipping, installation and any other charges); (i) repair of the defective materials; (ii) replacement of the defective materials; or (iii) refund of the original purchase price of the defective materials. Lumberock reserves the right to require, as a condition to recognizing any claim under this limited warranty, purchaser's return of any material, transportation charges prepaid by purchaser, to Lumberock's manufacturing plant for inspection and/or repair by Lumberock.


Backed by our

LIMITED LIFETIME WARRANTY

THIS LIMITED WARRANTY IS EXPRESSLY MADE IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. REFUND OF PURCHASE PRICE OR REPAIR OR REPLACEMENT OF DEFECTIVE GOODS AS PROVIDED ABOVE SHALL BE THE PURCHASER'S SOLE AND EXCLUSIVE REMEDY FOR THE CONTRACT, WARRANTY, NEGLIGENCE, TORT OR STRICT LIABILITY CLAIMS. IN NO EVENT SHALL Lumberock BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, ECONOMIC OR CONSEQUENTIAL DAMAGES OF ANY CHARACTER (INCLUDING BUT NOT LIMITED TO LOSS OF USE, LOST PROFITS, LOSS OF BUSINESS, BUSINESS INTERRUPTION, OR ATTORNEY'S FEES) CAUSED OR ALLEGED TO BE CAUSED IN WHOLE OR IN PART BY THE NEGLIGENCE, TORT, STRICT LIABILITY, BREACH OF CONTRACT, BREACH OF WARRANTY OR OTHER BREACH OF DUTY OF OR BY Lumberock.

THIS WARRANTY DOES NOT COVER DAMAGE OF ANY SORT RESULTING FROM FAULTY INSTALLATION, MISUSE, FIRE NEGLIGENCE, OR ACTS OF GOD, AND DOES NOT COVER COSMETIC ITEMS SUCH AS SCRATCHES, DENTS, STAINS, SOILING, OR DISCOLORATION OCCURRING IN THE NORMAL COURSE OF USAGE. PETROLEUM PRODUCTS SHOULD NOT BE USED ON Lumberock MATERIALS AND USING ANY PRODUCT WITH PETROLEUM DERIVATIVES WILL VOID THIS WARRANTY.

Register your warranty online at www.lumberock.com.

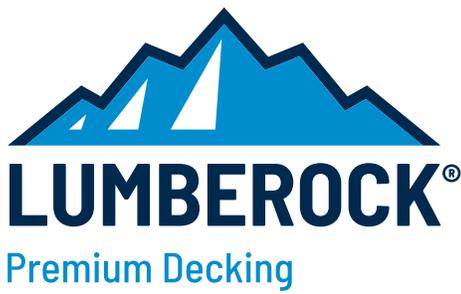

Authorized Distributor/Dealer:



Visit **[lumberock.com](https://www.lumberock.com)**
or call **800-480-2327**

See more of our projects:

 **lumberock**  **@lumberock**

Engineered Plastic Systems LLC
a **CMI** company

885 Church Road, Elgin, IL 60123 info@lumberock.com

Visit cmilc.com/legal for more information on referenced copyright, trademarks and patents owned by CMI Limited Co.

