



Lumberock® Premium FENCE BOARD

Lumberock® Fence Boards are the newest addition to our line of long-lasting, low-maintenance plastic building profiles. Our plastic lumber mimics the natural look of traditional wood, without the maintenance and decay. These slim, lightweight fence boards can be incorporated into many fencing applications and can be supported by both natural wood and steel frames.

Made with our signature mineral-added HDPE formula, Lumberock Fence Boards offer you a high-performance fencing option with the durability to last a lifetime:

- ▶ No noticeable fading
- ▶ No Organic Fills or PVC
- ▶ Minimal Maintenance
- ▶ Cuts and Routers Like Wood
- ▶ Mold and Mildew Free
- ▶ Will Not Rot, Crack, Splinter or Peel
- ▶ Resists Stains and Scratches
- ▶ Completely Waterproof





FENCE BOARD

BOARD DETAILS

- Solid extruded, mineral-added polyethylene board
- Size: 3/4" x 5.9"
- Length: 6' boards
(Custom Lengths may be purchased with minimum order)
- Colors: Available in all twelve signature Lumberock colors
- Available in square edge or dog eared edge
- Limited Lifetime Warranty

AVAILABLE COLORS



PRODUCT GUIDELINES

HANDLING AND STORAGE

- Always keep Lumberock Fence Board clean prior to installation.
- Note that Lumberock Fence Board is designed to allow for the end (both ends if square edge) to be trimmed prior to installation should any damage occur during handling or storage.
- Store Lumberock Fence Board out of the sun and lay boards flat. If stored off the ground, support boards every 18".

CARE AND MAINTENANCE


Lumberock Fence Board is not structural and therefore is only meant to serve as the picket and supported by either a wood frame or a structural steel frame. By using Lumberock Fence Board as your picket, you will never need to paint your fence again and can thus expect many years of carefree enjoyment.

When dirt or debris begin to accumulate on your fence, simply hose it off or lightly wash the boards with soap and water. Any standard household cleaner can be used without harming the plastic fence board. Occasionally, stubborn dirt can accumulate on the surface but it will not permeate the surface of the board and can be removed with a light pressure washing. We recommend using a maximum of 1800 psi with a 20-degree nozzle.

TOOLS AND FASTENERS

Standard woodworking tools and fasteners can be utilized when building with Lumberock Fence Boards.

Please note that Lumberock claims no liability or responsibility for the improper installation of our product. All installations are unique and it is the sole responsibility of the installer to determine specific requirements in regard to each application. We recommend that a licensed architect, engineer or local building official review all designs prior to installation.

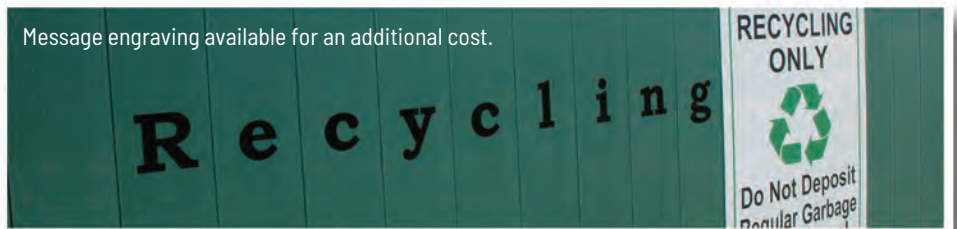

885 Church Road, Elgin, IL 60123
Visit lumberock.com or call **800-480-2327**

Find us on Facebook at www.facebook.com/lumberock

A product of
Engineered Plastic Systems, LLC

©2022 Lumberock® Premium Decking